



# VINYL CLICK

---

## HERRINGBONE



*Signature*  
COLLECTION



# VINYL CLICK HERRINGBONE

*Signature*  
COLLECTION

Vinyl Click Herringbone Signature brings timeless design and modern style together in one elegant floor. Each plank connects in the herringbone pattern, adding depth, movement, and character to any space. The result is a versatile surface that enhances every interior with warmth and sophistication. Designed to mirror the natural beauty of real wood, it features lifelike grain textures and soft tonal variations that bring warmth and sophistication to interiors.

Built for performance and beauty, Vinyl Click Herringbone Signature combines refined design with long-lasting practicality. Its durable, water-resistant surface stands up to daily use while remaining easy to maintain. The secure click-lock system allows for fast, adhesive-free installation, ensuring a seamless and flawless finish. Merging natural appeal with innovative construction, this range delivers enduring comfort, style, and balance to every interior.



Click it Easy



Anti Slip



Antibacterial



Easy Maintenance



Easy to Install



Thickness



Eco Friendly



Water Resistant



# THE 5 ADVANTAGES


Gerbür Vinyl Click Herringbone Signature Collection offers a durable and versatile flooring solution with a refined parquet-style appearance, easy click installation, and reduced underfoot noise for enhanced comfort. Designed for modern residential and commercial interiors, it is long-lasting, low maintenance, and ideal for everyday living spaces.

- 01 AUTHENTIC NATURAL LOOK AND FEEL**  
 Realistic wood grain detailing with synchronized surface texture creates the appearance and feel of genuine timber in an elegant herringbone format.
- 02 AVAILABLE IN MULTIPLE DESIGN VARIATIONS**  
 Offered in coordinated sizes and colour tones that allow flexible layout combinations for distinctive and personalized interior spaces.
- 03 SAFE & HEALTHIER INDOOR FLOORING**  
 Manufactured without harmful formaldehyde, helping create a safer and more comfortable indoor environment for everyday living.
- 04 EASY TO MAINTAIN & DURABLE SURFACE**  
 A strong protective top layer helps resist scratches, stains, and daily wear, making the floor simple to clean and maintain.
- 05 WATER-RESISTANT FOR EVERYDAY LIVING**  
 Designed to handle daily household moisture, making it suitable for living rooms, bedrooms, and kitchens while keeping its appearance over time.


## CREATE & COMBINE

The Gerbür Vinyl Click Herringbone Signature Collection allows flexible design possibilities with its classic herringbone plank format.


### Layout patterns

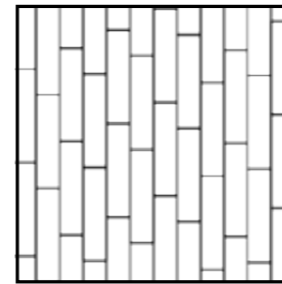


Irregular

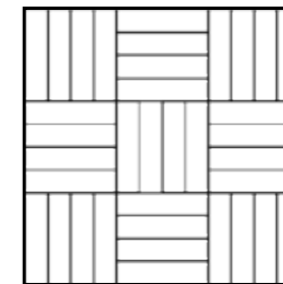


Block 2



Herringbone



Double herringbone



XL-herringbone



## Vanilla Haze

GB-SIG-HRB-01

750 x 150 x 5/03mm



## Ashen Oak

GB-SIG-HRB-03

750 x 150 x 5/03mm



## Soft Pebble

GB-SIG-HRB-02

750 x 150 x 5/03mm



## Porcelain Drift

GB-SIG-HRB-04

750 x 150 x 5/03mm





## Barrel Oak

GB-SIG-HRB-05


750 x 150 x 5/03mm



## Tudar Oak

GB-SIG-HRB-07

750 x 150 x 5/03mm

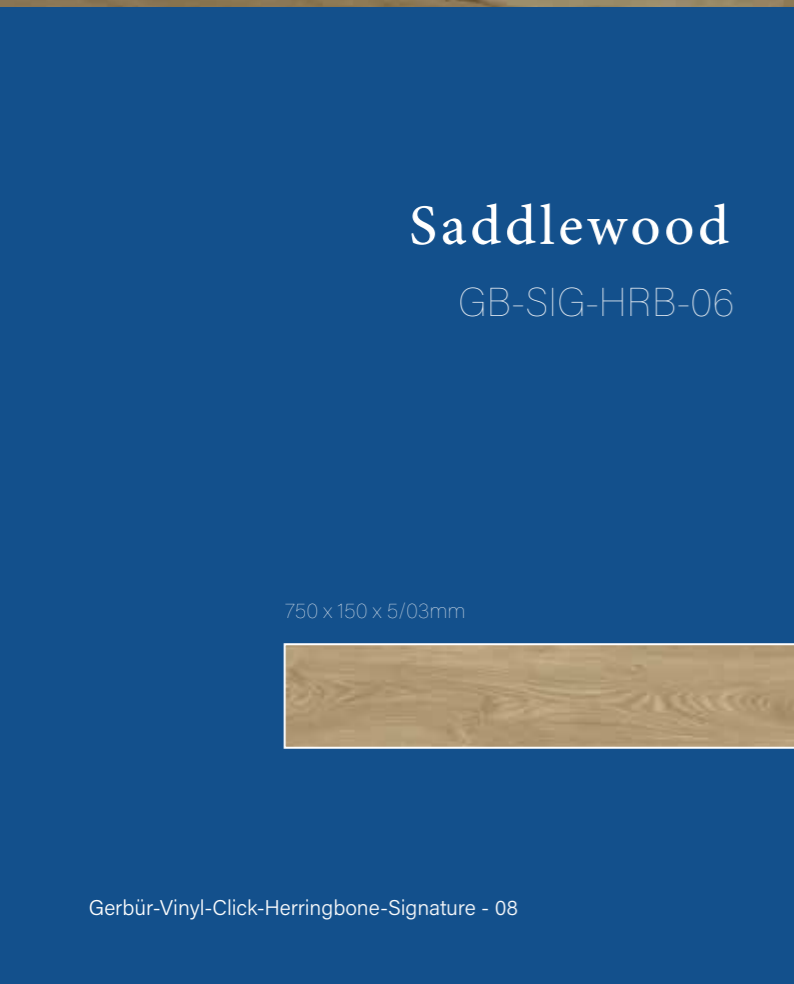

## Saddlewood

GB-SIG-HRB-06

750 x 150 x 5/03mm



## Umberwood

GB-SIG-HRB-08

750 x 150 x 5/03mm




# Vanilla Haze

GB-SIG-HRB-01

Vanilla Haze showcases a soft beige shade with delicate grain detailing that adds warmth and brightness to any space. Crafted in herringbone vinyl click, it's waterproof, durable, and easy to maintain, perfect for modern and timeless interiors.

Description	750mm x 150mm x 0.3/5mm
Colour	Beige
Finish	Matt
Style	Herringbone
Effect	Wood Effect
Residential Warranty	20 Years
Surface	Random Emboss
Installation	Uni-Clic - Floating Floor
Pack Size	1.8 m2
Water Resistant	Yes

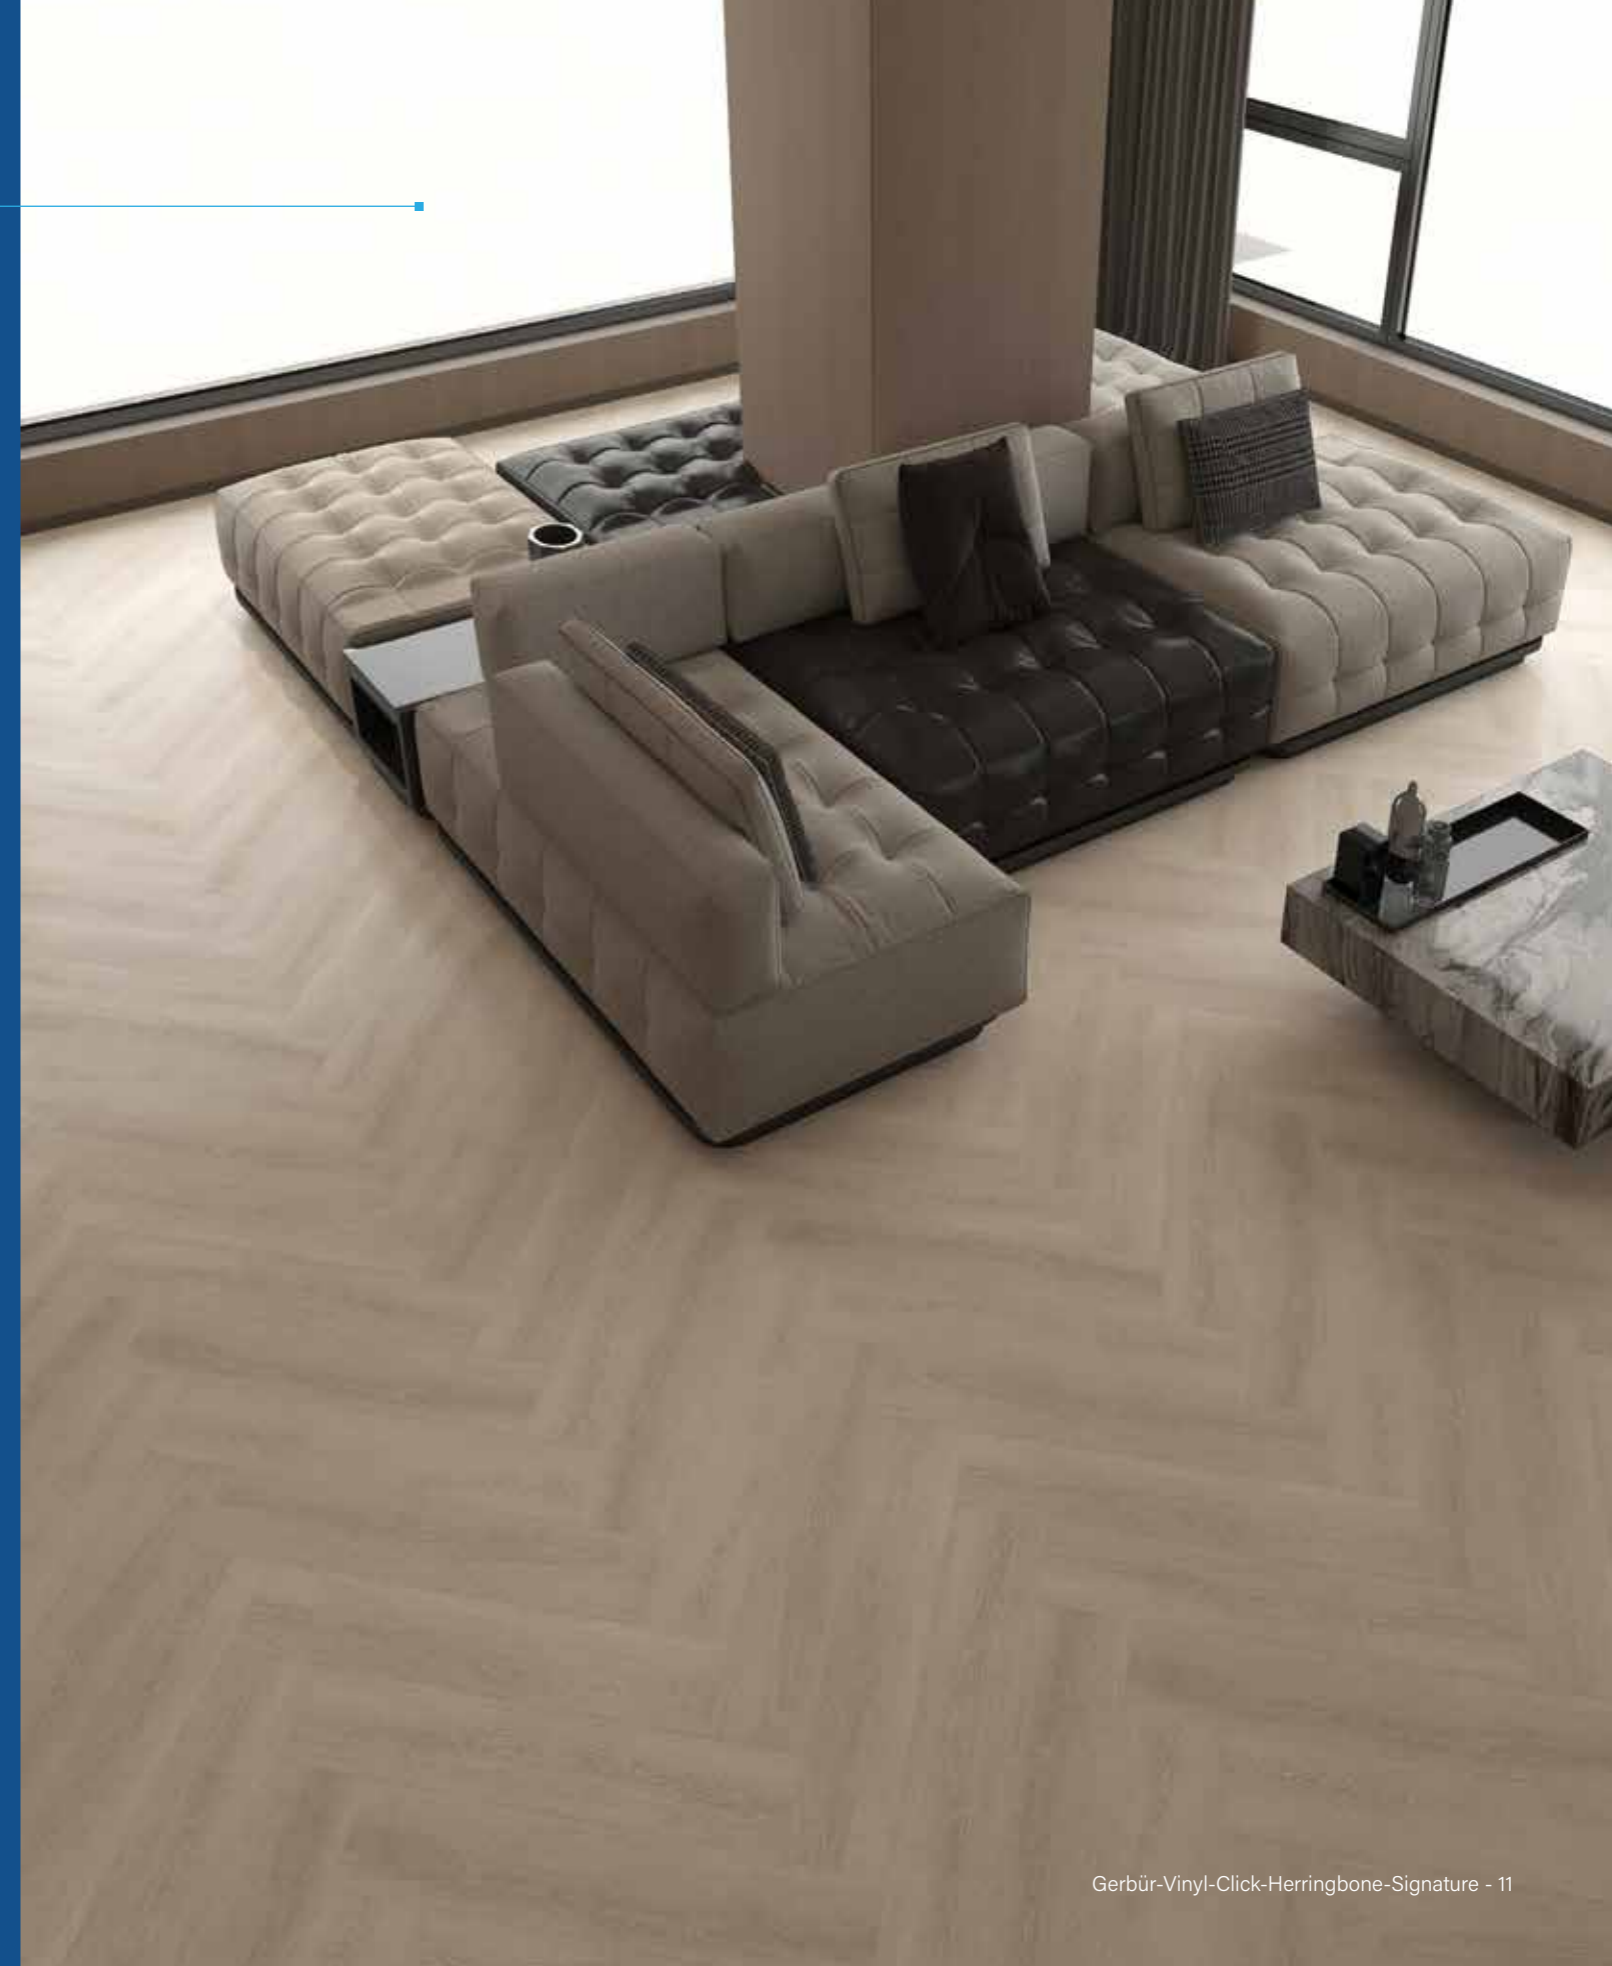

# Soft Pebble

GB-SIG-HRB-02



Soft Pebble features a deep beige tone with gentle wood detailing, bringing balance and elegance to any interior. Designed in herringbone vinyl click, it's water-resistant, resilient, and effortless to maintain for everyday living.

Description	750mm x 150mm x 0.3/5mm
Colour	Brown
Finish	Matt
Style	Herringbone
Effect	Wood Effect
Residential Warranty	20 Years
Surface	Random Emboss
Installation	Uni-Clic - Floating Floor
Pack Size	1.8 m <sup>2</sup>
Water Resistant	Yes




# Ashen Oak

GB-SIG-HRB-03



Ashen Oak features a light oak shade with gentle grey undertones, creating a cool and contemporary look perfect for minimalist interiors. Crafted in herringbone vinyl click, it's water-resistant, durable, and easy to maintain for everyday style.

Description	750mm x 150mm x 0.3/5mm
Colour	Brown
Finish	Matt
Style	Herringbone
Effect	Wood Effect
Residential Warranty	20 Years
Surface	Random Emboss
Installation	Uni-Clic - Floating Floor
Pack Size	1.8 m <sup>2</sup>
Water Resistant	Yes

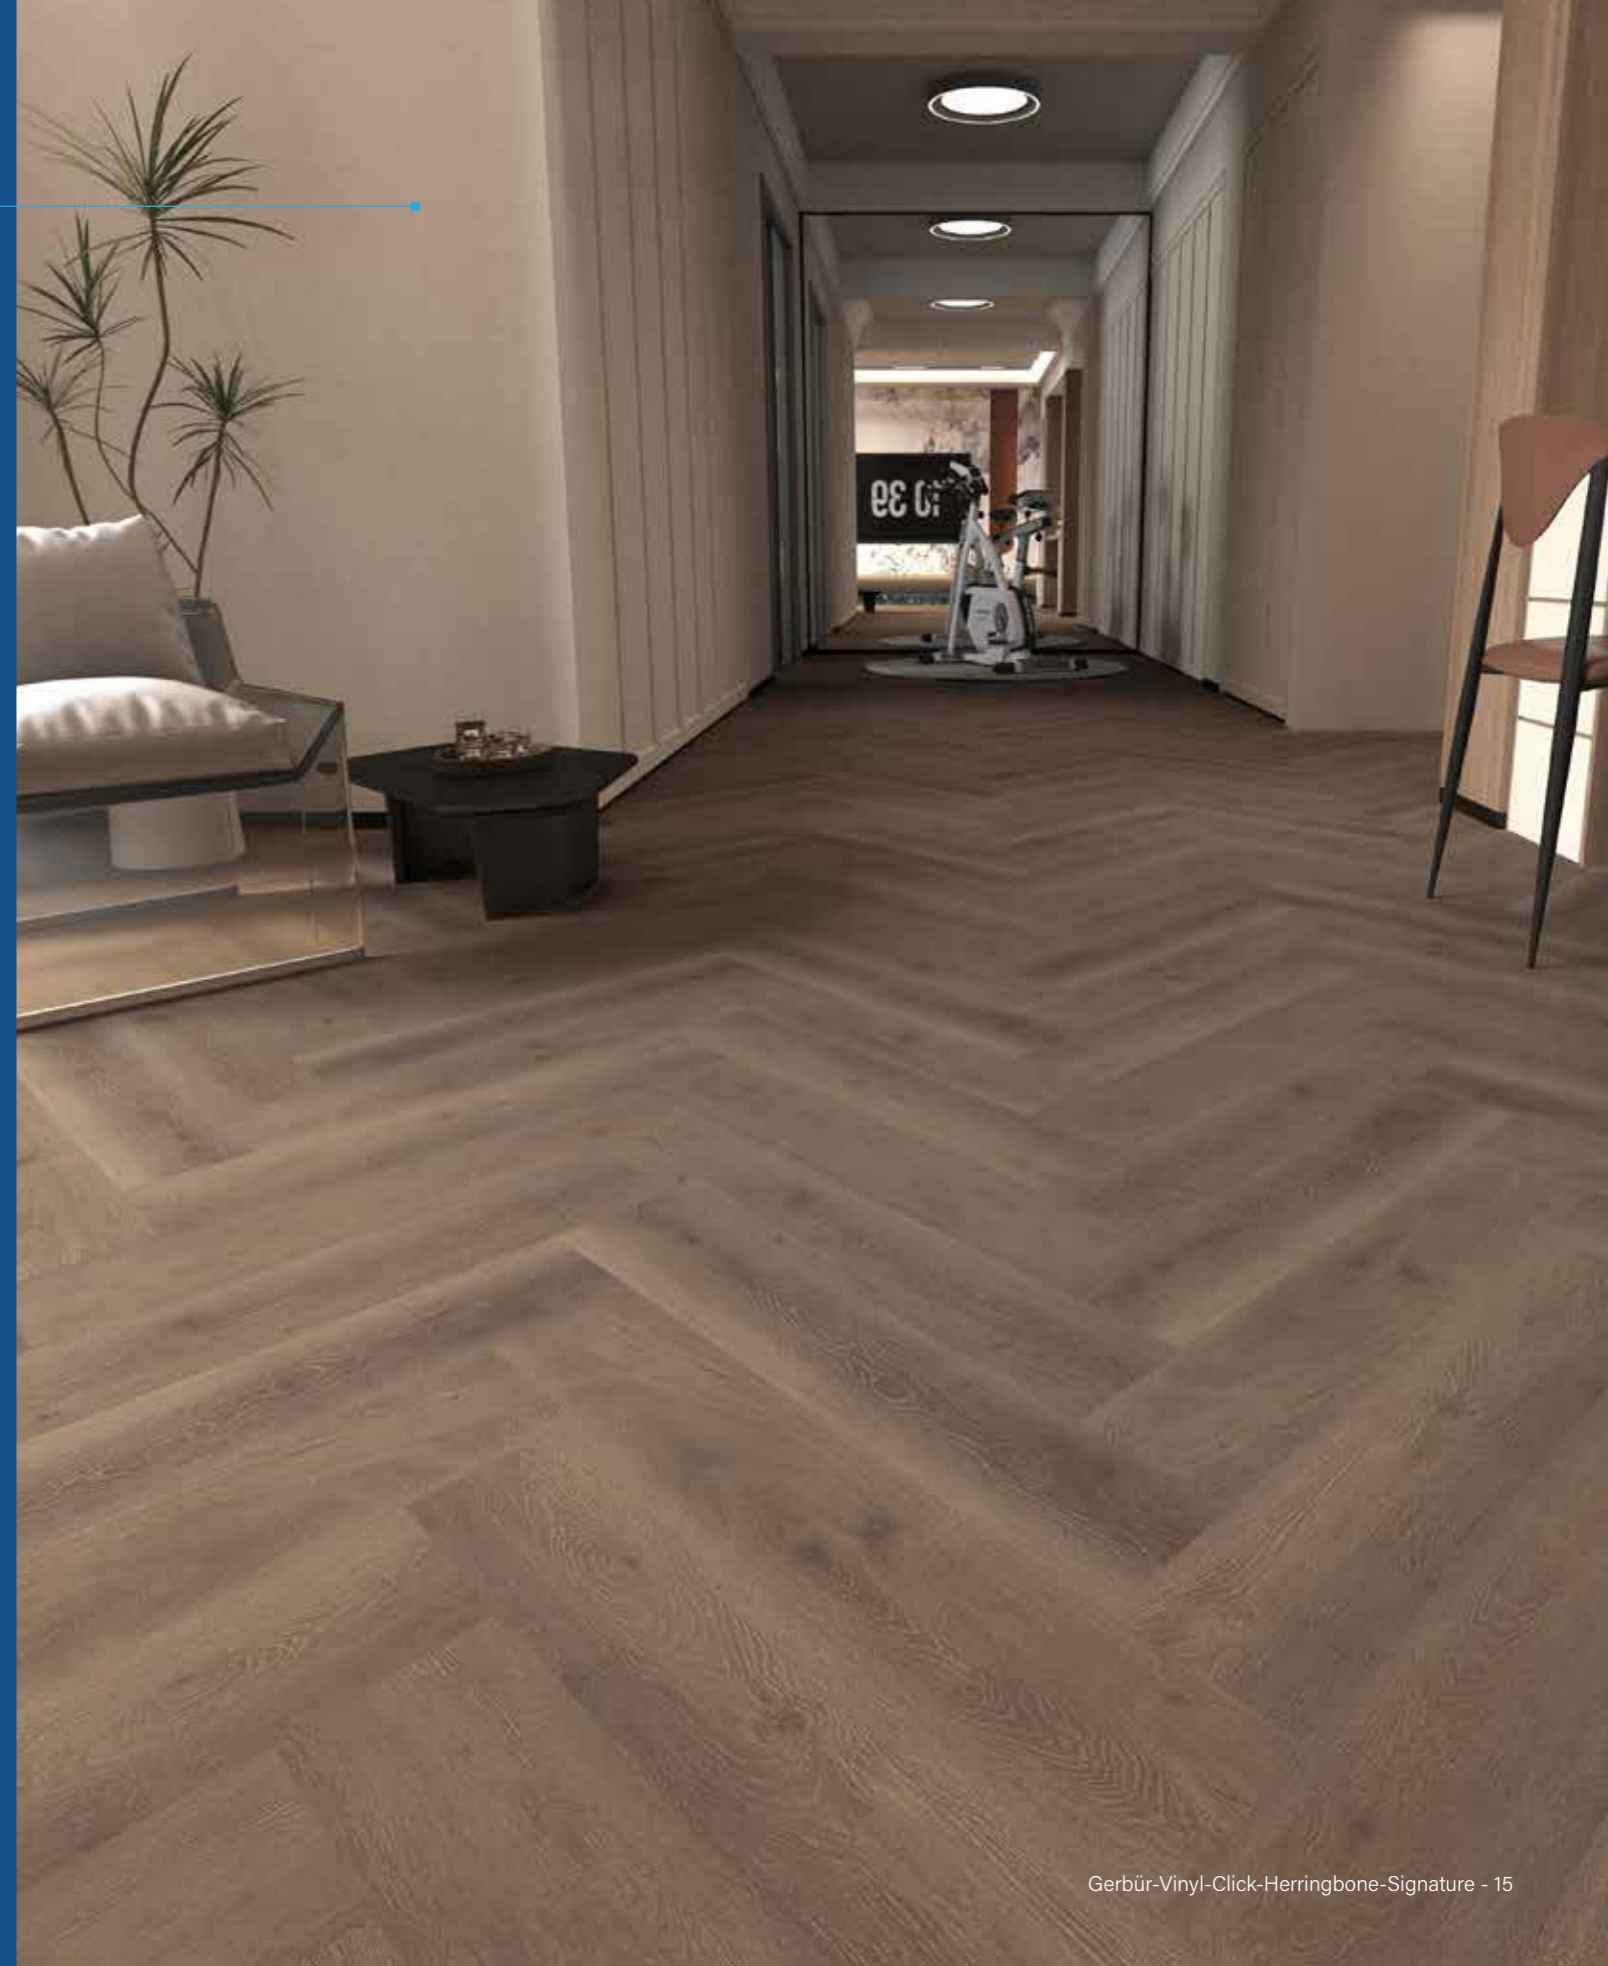

# Porcelain Drift

GB-SIG-HRB-04



Porcelain Drift features a natural oak tone with subtle honey undertones. Its elegant herringbone vinyl click design combines water-resistant performance, lasting durability, and effortless style for modern living.

Description	750mm x 150mm x 0.3/5mm
Colour	Brown
Finish	Matt
Style	Herringbone
Effect	Wood Effect
Residential Warranty	20 Years
Surface	Random Emboss
Installation	Uni-Clic - Floating Floor
Pack Size	1.8 m <sup>2</sup>
Water Resistant	Yes



# Barrel Oak

GB-SIG-HRB-05



Barrel Oak adds refined sophistication with its rich oak tone and natural grain detailing. The herringbone vinyl click design offers water-resistant durability, easy installation, and timeless style — perfect for classic and modern interiors alike.

Description	750mm x 150mm x 0.3/5mm
Colour	Brown
Finish	Matt
Style	Herringbone
Effect	Wood Effect
Residential Warranty	20 Years
Surface	Random Emboss
Installation	Uni-Clic - Floating Floor
Pack Size	1.8 m <sup>2</sup>
Water Resistant	Yes



# Saddlewood

GB-SIG-HRB-06



Saddlewood features a neutral oak tone with gentle rustic character, creating a cozy and welcoming feel in any interior. The herringbone vinyl click design offers water-resistant strength, easy installation, and lasting comfort for relaxed, inviting spaces.

Description	750mm x 150mm x 0.3/5mm
Colour	Oak
Finish	Matt
Style	Herringbone
Effect	Wood Effect
Residential Warranty	20 Years
Surface	Random Emboss
Installation	Uni-Clic - Floating Floor
Pack Size	1.8 m <sup>2</sup>
Water Resistant	Yes



# Tudor Oak

GB-SIG-HRB-07



Tudor Oak reflects the warmth and depth of natural brown oak in an elegant herringbone pattern. Its water-resistant vinyl click design ensures durability, easy maintenance, and a refined wood-look finish that complements both modern and classic interiors.

Description	750mm x 150mm x 0.3/5mm
Colour	Brown
Finish	Matt
Style	Herringbone
Effect	Wood Effect
Residential Warranty	20 Years
Surface	Random Emboss
Installation	Uni-Clic - Floating Floor
Pack Size	1.8 m <sup>2</sup>
Water Resistant	Yes



# Umberwood

GB-SIG-HRB-08



Umberwood features a dark oak shade with subtle grey undertones, creating a bold yet refined atmosphere. The herringbone vinyl click design offers water-resistant protection, easy installation, and long-lasting durability for stylish modern interiors.

Description	750mm x 150mm x 0.3/5mm
Colour	Brown
Finish	Matt
Style	Herringbone
Effect	Wood Effect
Residential Warranty	20 Years
Surface	Random Emboss
Installation	Uni-Clic - Floating Floor
Pack Size	1.8 m <sup>2</sup>
Water Resistant	Yes



Symbol	Item	Test Method	Requireme (Test Standard)	Test Result
	Classification (Level of use)	EN ISO 10582	Domestic - Heavy (Class 23) Wear Layer (Nominal): $\geq 0.30\text{mm}$	Pass (Nominal)
	Squareness	ISO 24342	Side length $\leq 400\text{mm}$ : $\leq 0.25\text{ mm}$ ; Side length $>400\text{mm}$ : $\leq 0.35\text{ mm}$ ;	Deviation range: X Direction: $-0.05\text{--}0.00\text{mm}$ Y Direction: $-0.05\text{--}0.05\text{mm}$
	Straightness	ISO 24342	Side length $>400\text{ mm}$ (intended for heat welding): $\leq 0.50\text{mm}$ ;	Deviation range: X Direction: $0.00\text{--}+0.05\text{mm}$ Y Direction: $0.00\text{--}+0.05\text{mm}$
	Overall thickness	ISO 24346	Specimen: $150 \times 150 \times 5.50\text{mm}$ , 5pcs Mass applied: $0.20 \pm 0.02\text{kg}$ Diameter of upper plate: $25.3 \pm 0.1\text{mm}$ Load time: 5s	Ave.: 5.50mm Max.: 5.51mm Min.: 5.50mm
	Wear resistance	ISO 24338 Procedure A	$\geq 4000$ cycles (AC4)	Compliant
	Reaction to Fire & Smoke Production	EN 13501-1	Bfl-s1 Classification Critical Flux: $\geq 8.0\text{kW/m}$ Flame Spread: $\leq 150\text{mm}$ within 20s Smoke value as % x min: $\leq 750$	Bfl-s1
	Formaldehyde Emission	EN 717-1	Method Detection Limit: $0.080\text{ mg/m}^3$	Not Detected Formaldehyde free
	Dimensional stability	ISO 23999	Tiles/planks intended for dry-joint laying and glued installation: $\leq  0.25 \%$ ; Tiles/planks intended for loose lay or floating installation: $ 0.15 \%$ .	Average: X Direction: $-0.05\%$ Y Direction: $0.00\%$
	Curling	ISO 23999	Tiles/planks intended for dry-joint laying and glued installation: $\leq  2 \text{mm}$ ; Tiles/planks intended for loose lay or floating installation: $\leq  1 \text{mm}$ .	Average: Curling initial: $0.5\text{mm}$ Curling final: $0.0\text{mm}$
	Residual indentation	ISO 24343-1	$\leq 0.1\text{mm}$	Average: $0.04\text{mm}$
	Effect of A Castor Chair	ISO 4918	(only for $\geq$ class32) After 25,000 cycles, no delamination shall occur. No disturbance to the surface other than a slight change in appearance.	No visible damage
	Colour Fastness to Light	ISO 105-BO2	6 minimum	Comparison upto blue wool reference 6; Grade (B.W.S): Better than 6
	Height Difference	ISO 10582	Ave.: $\leq 0.10\text{mm}$ Individual values: $\leq 0.15\text{mm}$	Ave.: $0.05\text{mm}$ Max.: $0.10\text{mm}$
	Locking Strength	ISO 10582	Only for Commercial use: Class 31,32,33: $\geq 1.5\text{ kN/m}$ ; Class 34: $\geq 2.0\text{ kN/m}$	Average: Long side(X): $4.8\text{ kN/m}$ Short side(Y): $4.1\text{ kN/m}$
	Slip resistance	AS 4586	Oil-wet ramp test	R10 Class Critical angle of inclination: $15.2^\circ$
	Chemical Resistance	ASTM F925-13	No more than a slight change in surface dulling, surface attack or staining	Rating 0: No change
	Thermal Conductivity	EN 14041	N/A	$0.098\text{ W}/(\text{m} \cdot \text{K})$ at $25\text{ }^\circ\text{C}$
	Airborne sound transmission loss	ASTM E90-09 ASTM E413-16	N/A	STC = $73\text{dB}$ IIC = $75\text{dB}$
	Airborne sound transmission loss	ASTM E492-09 ASTM E989-18	N/A	

## FLOORCARE



### Initial care after your new floor has been installed:

- Avoid walking on the floor for at least 24 hours after installation to allow the locking system to settle properly
- Ensure the installation area is clean before regular use to prevent loose grit from scratching the surface
- Use felt protectors under furniture before placing items on the new floor
- Maintain indoor temperature and humidity within normal living conditions for best performance

### Day-to-day cleaning:

- Sweep or vacuum regularly to remove loose dirt, dust, or sand
- Clean using a slightly damp mop with a neutral vinyl floor cleaner
- Avoid excessive water during cleaning as unnecessary moisture should not remain on the surface
- Mop evenly across the floor without flooding the joints
- Remove any remaining moisture with a dry mop if required
- Allow the surface to air dry naturally after cleaning

Regular light cleaning helps preserve the appearance of your floor and is more effective than occasional intensive cleaning.

### Do:

- Place entrance mats at doorways to reduce dirt and moisture transfer
- Use felt pads under chair legs and furniture to prevent surface scratches
- Lift furniture when moving it instead of dragging across the floor
- Wipe spills immediately to maintain slip resistance and surface condition
- Use protective mats under office chairs with castors
- Trim pets' nails regularly to avoid fine surface scratches

### Don't:

- Do not use abrasive cleaners, steel wool, or scouring pads
- Avoid steam cleaners or excessive water exposure
- Do not apply wax, polish, or solvent-based cleaning products
- Avoid using bleach, strong detergents, or oil-based cleaners
- Do not drag heavy furniture directly across the floor surface

We recommend using the Gerbur Vinyl Floor Cleaner, specially developed for LVT and vinyl click flooring, to maintain the appearance and long-term performance of your floor. For best results and additional care guidance, please contact your local authorised Gerbur flooring supplier.



# VINYL CLICK

## HERRINGBONE



*Signature*  
COLLECTION



Click It Easy



Anti Slip



Antibacterial



Easy Maintenance



Easy to Install



Thickness



Eco Friendly



Water Resistant

Email : [info@gerbur.com](mailto:info@gerbur.com)

Website : [www.gerbur.com](http://www.gerbur.com)

© Copyright 2025 Gerbur HmbH, all rights reserved.