
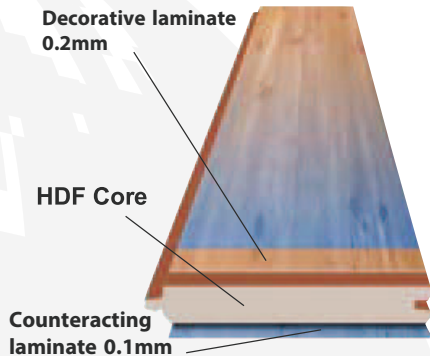


GERBUR STRAUSS - TECHNICAL SPECIFICATION

PROPERTY	INFO	CLASS 31
Ranges	Blond Oak, Rustic Walnut, Walnut, Alligator	 AC4 MEDIUM COMMERCIAL
Dimension	808mm x 402mm x 12mm	
Package	6 pieces per carton = 1.95m ²	
Production	Direct faced laminate flooring / melamine impregnated paper / core high-density fibreboard made using 50% FSC timber certified by BM TRADA under license TT-COC-1913	
Laying	Must be layed as floating floor	
Classification (BS EN 13329)	23: Heavy domestic use 32: Medium commercial use	 Decorative laminate 0.2mm HDF Core Counteracting laminate 0.1mm
Warranty	Contact Gerbür or an authorised supplier for current warranty information	

PRODUCT CHARACTERISTICS HDF-BASE

FACTOR	STANDARD	UNIT	NOMINAL VALUE
Formaldehyde content	EN 622-1	mg/100g	<8 (class E1)
24h swelling	EN 622-5	%	<17%
Bending strength	EN 622-5	N/mm ²	23
Internal bond	EN 622-5	N/mm ²	1
Moisture content	EN 622-1	%	4 to 11

PRODUCT CHARACTERISTICS OF LAMINATED FLOOR CORE-BOARDS CLASS: 23-3

FACTOR	STANDARD	UNIT	NOMINAL VALUE
Abrasion	EN 13329	REVS	AC 4: IP ≥4,000
Impact resistance	EN 13329	N & mm	≥ IC 2
Stain resistance	EN 438.2.15	Scale*	Group 1&2: 5 Group 3:4
Edge swelling	EN 13329	%	≤ 18